

DEKDRAIN
B125


DEKDRAIN B125

ALL IN

DekDrain B125 loading EN1433 is certified for use on driveways, car parks, pedestrian areas, and pathways.

Do you want the best look and ease of installation in a plastic channel, but A15 just isn't up to the job? DekDrain B125 is ALL IN.

B125 ALL IN offers you ease in ordering and design. Where other systems require you to purchase the channel, two grates, and two locking bars separately (which could be masking a higher cost), DekDrain ALL IN does what it says on the tin. It comes complete: no hassle, no lost components, and no hidden costs. It's ALL IN.



Grid Design Grating
Stylish & great performance

12

12 Outlet Options
Easily connect to underground drainage



PP Channel & PVC Grating
Light weight, easy to handle, fewer damages onsite or during transport



Easy & Clean To Cut vs Concrete
No heavy machinery - No dust clouds



find out more
www.deks.co.uk/b125

DekDrain B125 ALL IN

Use on pavements, driveways, and small car parks where a higher weight limit is needed. B125 is designed for heavier traffic areas of up to 12.5 tonnes. The channel measures 1000(L) x 131(W) x 98(H)mm.




Product Code:
DCD-B125-131/98-GRID-BLACK

- Grid grating for effective water disruption - more water into the drain
- Plastic grating - strong, lightweight, cost effective
- Each grating is secured by a bolt and locking bar
- Easily create a 90-degree tee or elbow with no corner quads
- Flexible outlet connections - 12 outlet options to best suit your installation
- No additional fittings needed - ALL IN saves money

No corner quads required

Each B125 length features three connection points on each side of the channel body, as well as connection points at either end of the channel. Easily create the channel layout that you need to complete the job. Simply remove the blanking cap on the connection point you are using and connect the next length of channel by slotting it into place. The connection securely holds in place during installation.

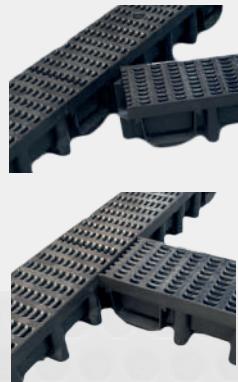

DekDrain B125 Outlets


If you like choice, you'll love DekDrain B125. A single length has 12 outlet options and 11 outlet points. All of these options are created from only three additional connections. Each outlet end cap can also double as a blanking off end cap.

2 End Outlets
To connect from the socket to a 50mm pipe use
DCD-B125-131/98-SOEC or DCD-B125-131/98-SOOO to connect to a 100mm drainage



Socket End

6 Side Outlets
Use DCD-B125-131/98-SPEC to connect from these outlets to a 50mm pipe. (also use to connect to another channel)

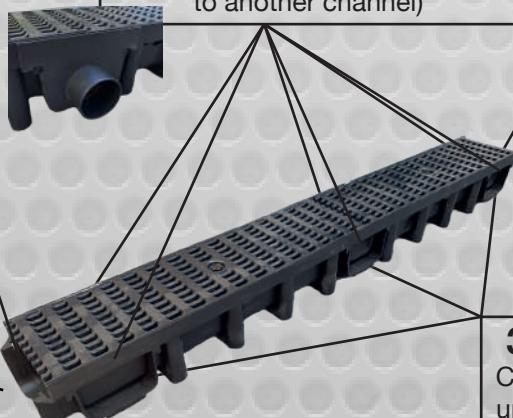

1 End Outlets
To connect from the spigot connection to a 50mm pipe use DCD-B125-131/98-SPEC



Spigot End

3 Bottom Outlets
Connect directly to 100mm underground drainage pipe

www.deks.co.uk



**DEKDRAIN
B125**

